


EXTERIOR APPLICATIONS



CREATE
THE
DIFFERENCE

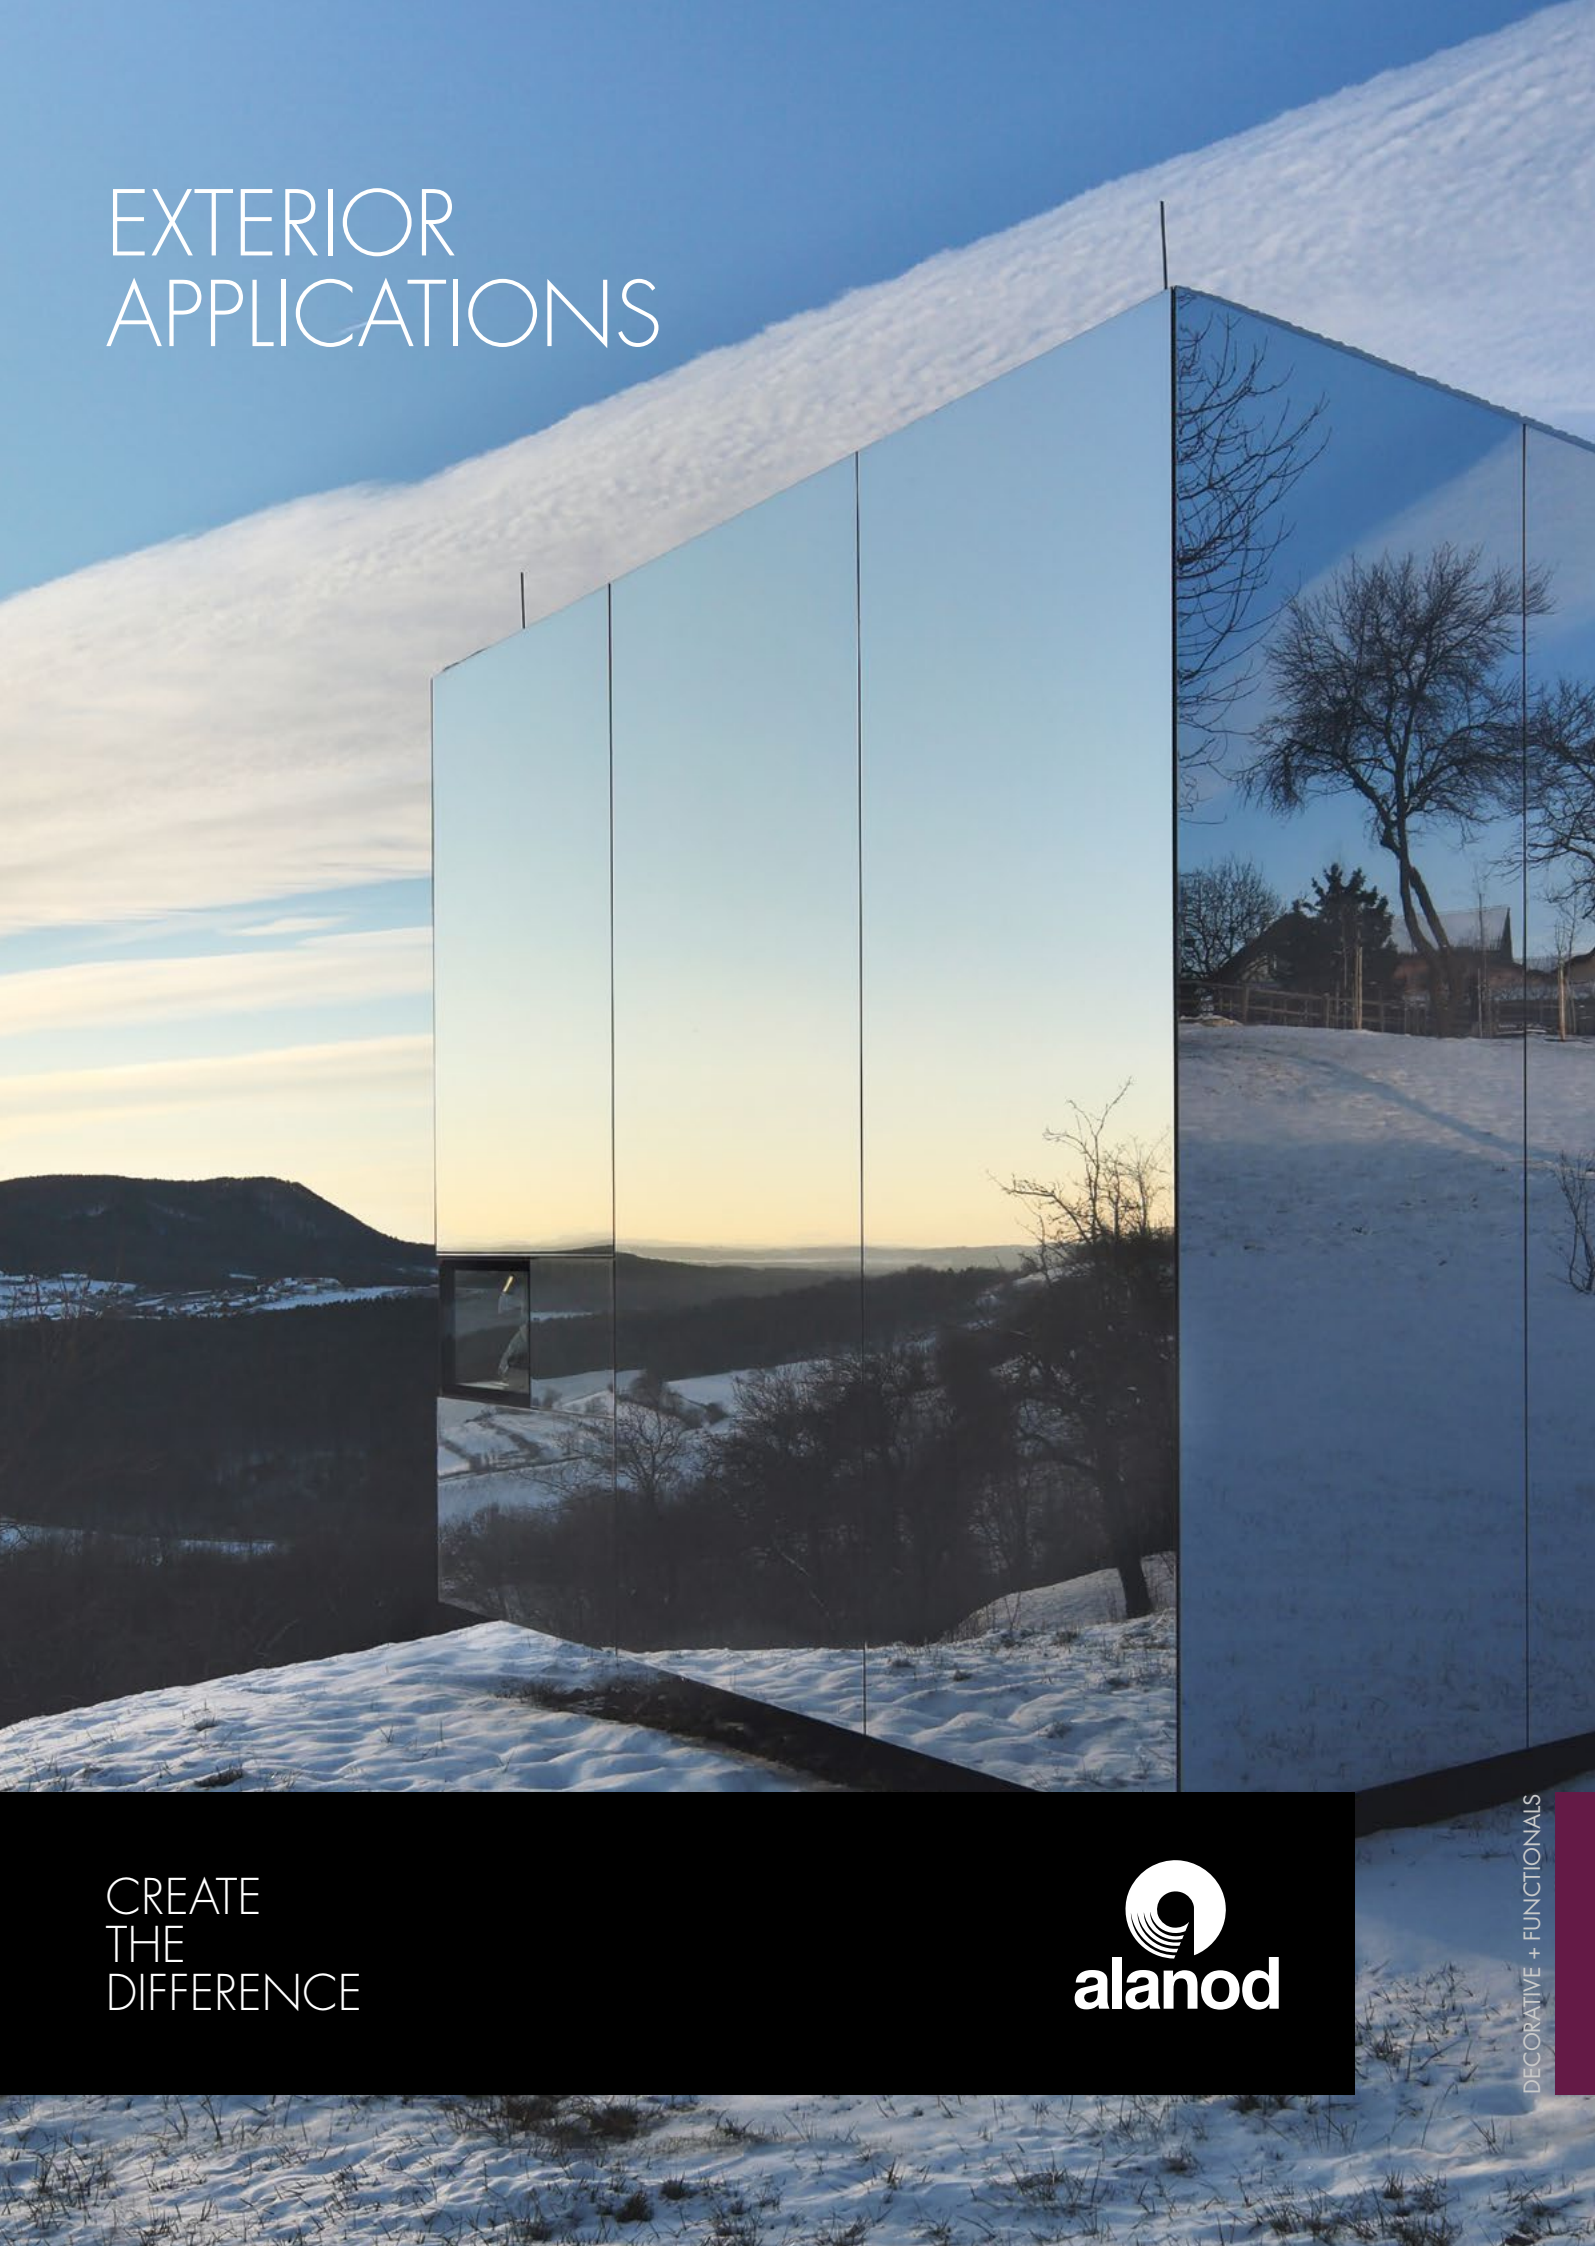

DECO PRIME®

Tailor-made for every facade

The Alanod range of thicknesses varies from 0,1mm to 1,5mm. This range offers the option to incorporate our surfaces into various structural elements and also allows the facade designer to use different techniques to complete projects.


To enhance the connection of Alanod surfaces to the structural material – such as the ACP (aluminium composite panel), HPL (high pressure laminates) full core panels and honeycomb panels, an extensive range of primers is available. This means our surfaces can be supplied as already-finished material, ready for production.

Restaurant Steirereck in
Vienna. Facade made
of DECO PRIME® 30
with FL22





©Sergio Grazia
Riverside Gently in France.
Facade made of
DECO PRIME®4 with FL01

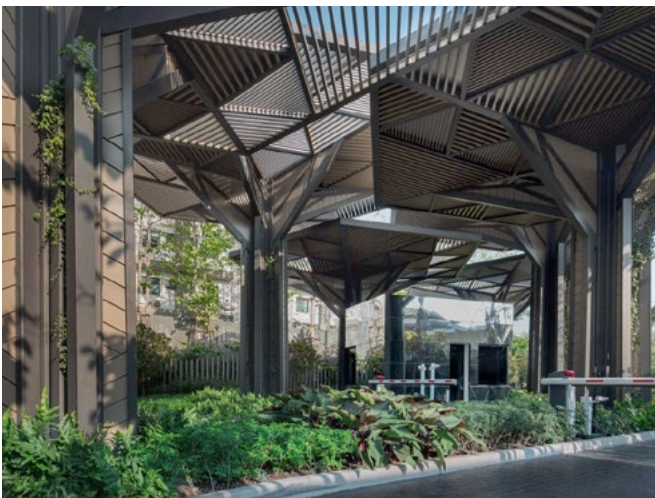

Mool Bursiri Wacharapol in Thailand.
Cladding made of DECO PRIME®4 with FL22

Technical Specifications

Decorations that make the difference

We have two different protective coatings developed specifically for the requirements of facade design:

- FL01 is an extra clear, thin protective coating suitable for our DECO PRIME® 4 mirrored surface. It is a highly transparent, hard and brilliant lacquer – slightly formable or not formed at all at later stages.
- FL22 is a translucent, formable protective coating suitable for all our surface finishing. It allows for the finished product to be bent and roll-formed, and is recommended for cassette panels.

Alanod's translucent, coloured aluminium surfaces, only available with an FL22 coating, retain the metallic gleam and reflection properties with all their nuances. Today our range includes coloured options of gold, copper, bronze, stainless steel, and anthracite. Our treatments maintain all the advantages of aluminium's lightweight and easy workability.

General overview of the qualities

Alanod products for facades and outdoor decorative applications are guaranteed for a period of up to 20 years¹⁾.

Quality name	Description	Max. width	Min. thickness	Max. thickness	Front side ²⁾		Reverse side ²⁾		Warranty ¹⁾
					FL01	FL22	RP01	RP05	
DECO PRIME® 4	gloss mirror	1.250mm	0,30mm	1,00mm	✓	✓	✓	✓	20 years
DECO PRIME® 20	reflection matte	1.250mm	0,40mm	0,75mm	–	✓	✓	✓	20 years
DECO PRIME® 30	ghost line	1.250mm	0,50mm	0,50mm	–	✓	✓	✓	20 years
DECO PRIME® 152	blur	1.250mm	0,30mm	1,00mm	–	✓	✓	✓	20 years
DECO PRIME® 7/711	brushed	1.350mm	0,10mm	1,00mm	–	✓	✓	✓	20 years

FL01: extra clear, thin protective coating

FL22: translucent, formable protective coating

RP01: primer for HPL

RP05: primer for honeycomb, PE, epoxy

¹⁾According to the terms and conditions of our warranty for facade products

²⁾This table illustrates the general capability. Please ask for specific requests.



Surfaces that pass the test

We submitted our surfaces to a multitude of tests that prove their excellent properties under various conditions.

		Resistance to salt spray	Gloss	Colour difference	Humidity resistance	Bending
Standard	DIN-EN	DIN EN 13523-8	DIN EN 13523-2	DIN EN 13523-3	DIN EN ISO 6270-1	DIN EN 13523-7
	AAMA	ASTM B117	ASTM D523	ASTM D2244	ASTM D2247	ASTM D4145
Requested value		B117 Index 3 Rating No. 8	–	$\Delta E < 2$ Batch to batch	$< B2 (S2)$ Rating No. 8	2t
DECO PRIME® 4	FL01	✓	✓	✓	✓	✓
	FL22	✓	✓	✓	✓	✓
DECO PRIME® 20	FL22	✓	✓	✓	✓	✓
DECO PRIME® 30	FL22	✓	✓	✓	✓	✓
DECO PRIME® 152	FL22	✓	✓	✓	✓	✓
DECO PRIME® 7/711	FL22	✓	✓	✓	✓	✓

Comprehensive test information is available upon request.

Care for the Environment

Conserving natural resources has been part of our corporate philosophy ever since our company was founded. Today, Alanod is a climate-neutral, sustainably run company. Due to the excellent recycling properties of aluminium, our materials use up to 90% recycled aluminium. This consumes up to 95% less energy compared to primary aluminium production. Moreover, our production uses “100% green electricity”.

Made in Germany

The high-tech material is completely manufactured at our sites in Germany.

ALANOD GmbH & Co. KG
Egerstr. 12 · 58256 Ennepetal · Germany
Tel. +49 2333 986-500
info@alanod.de · www.alanod.com

