

Safety device to U/L 23Y5, EN 730-1, ISO 5175

Model: **DGN**

For Protection of Cylinder-Regulators and Tapping Points.



The standard safety device for industries and small enterprises. The type DGN covers the most applications and can be used on tapping points as well as on single cylinders.

Safety elements:

- Gas non-return valve
- Flame arrestor
- Thermal cut-off valve

NV
FA
TV

Dust filter promotes long life

Threads:

In accordance with EN 560, ISO 3253 for common connections

Fuel Gas: G3/8" LH, M16X1.5 LH, UNF9/16"-18 LH, UNF5/8"-18 LH, 1/4"-NPT

Oxygen/ Compressed Air: G1/4" RH, G3/8" RH, M16X1.5 RH, UNF9/16"-18 RH, UNF5/8"-18 RH, 1/4"-NPT

For additional connection sizes please contact SuperFlash at (440) 716-9960, toll free at 888/327-7306, or by email at sales@oxyfuelsafety.com

Gas-Types:

Acetylene (A), Town Gas (C), Compressed Air (D), Ethylene (E), Hydrogen (H), Natural Gas (Methane) (M), Oxygen (O), Propane (P), MPS Methylacetylen-Propadien-Mixture (Y)

Working pressure:

A 15 PSIG / 1.0 bar; H 50 PSIG / 3.5 bar; CEMPY 72 PSIG / 5.0 bar; DO 143 PSIG / 10.0 bar

Maintenance:

Annual examination for damage using SuperFlash's PVGD According to TRAC 207, 9.36 and BGV D1, § 49
Safety devices may be opened and repaired by the manufacturer only.




Design:

Other materials and surface finishing on request.

Safety device to U/L 23Y5, EN 730-1, ISO 5175

Model: DGN

Flow-Rate Data:

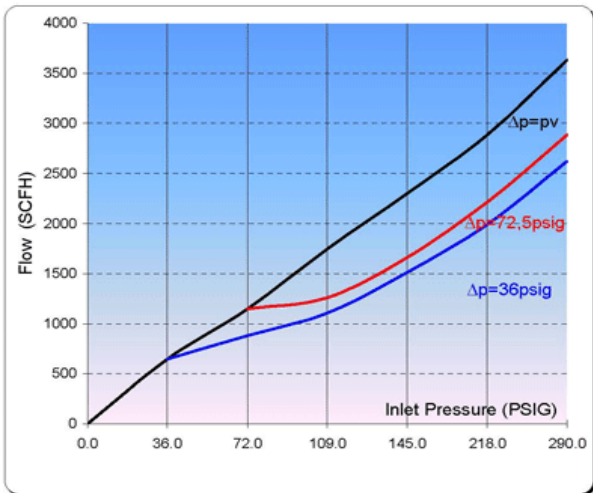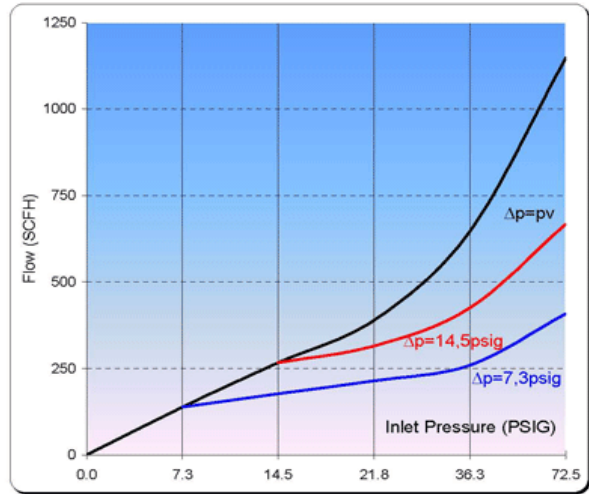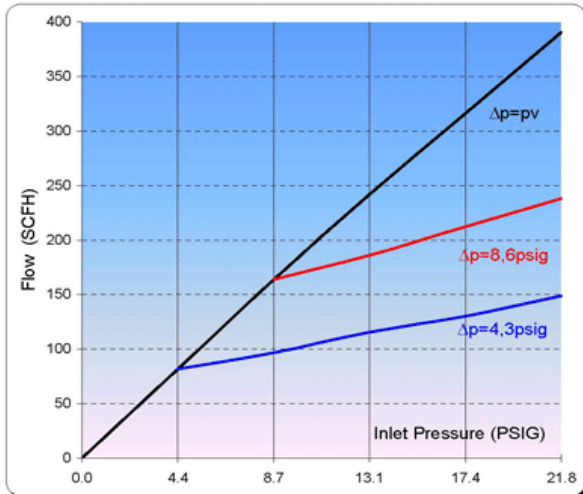

Conversion Factor:

(A) Acetylene C ₂ H ₂ :	x 1.04
(C) Town Gas:	x 1.54
(E) Ethylene:	x 1.02
(H) Hydrogen H ₂ :	x 3.75
(M) Methane: CH ₄ :	x 1.33
(P) Propane C ₃ H ₈ :	x 0.80
(M) Natural Gas	x 1.25
(Y) MAPP-Gas C ₃ H ₄	x 0.81
(O) Oxygen O ₂ :	x 0.95

1 bar = 14.28 psi

1 bar = 100 kPa

1 m³ = 1.31 cu.yd