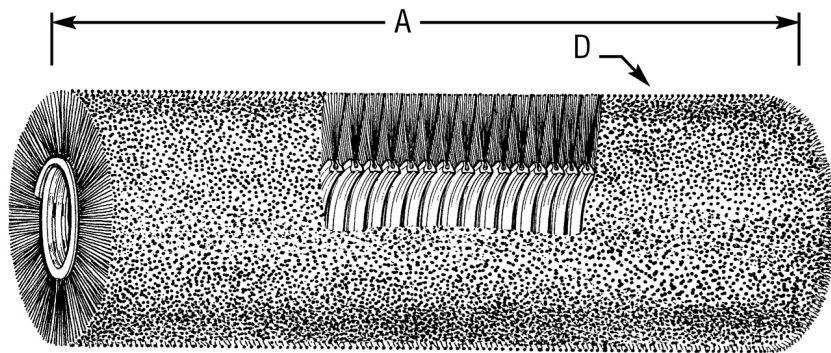


- A. Brush Face _____
 B. Outside Diameter _____
 C. Inside Diameter _____
 D. Brush Filling Type _____

(nylon, polypropylene, tampico, horse hair, wire, other)

Bristle Diameter _____

Color _____ crimped ☐ level ☐

- E. Metal Channel Size # _____

	width	x	height
#2.5	1/8 (.125)	x	1/8 (.125)
#3	5/32 (.156)	x	5/32 (.156)
#4	3/16 (.187)	x	3/16 (.187)
#5	1/4 (.250)	x	1/4 (.250)
#7	5/16 (.312)	x	5/16 (.312)
#8	23/64 (.359)	x	23/64 (.359)

- F. Channel Material

Galvanized ☐

Stainless Steel ☐

Aluminum ☐

(galvanized is the most common)

- G. Approximate RPM _____

- H. Wet or Dry Use _____

- I. Bristle Density
 light ☐ medium ☐ heavy ☐

- J. Mounting Clips Yes ☐ No ☐

- K. Quantity Per Order _____

- L. Annual Usage _____

- M. Brush Application and/or Comments

Please indicate any critical tolerances.

We manufacture the brush to fit "snug" on the customer's shaft, unless otherwise specified. If you would like us to provide a shaft, fill out the brush core design sheet.

Brushes are wound right hand, as pictured, unless otherwise specified.

Brushes are supplied unmounted unless otherwise specified.

COMPANY INFO

Quotation Requested By:

Company _____

Contact Person _____

Address _____

Telephone # _____

Fax # _____

E-mail Address _____



440-542-9600

Fax 440-542-9696

E-mail info@precisionbrush.com

www.precisionbrush.com

6700 Parkland Blvd., Solon, OH 44139 USA